


Technical Specification

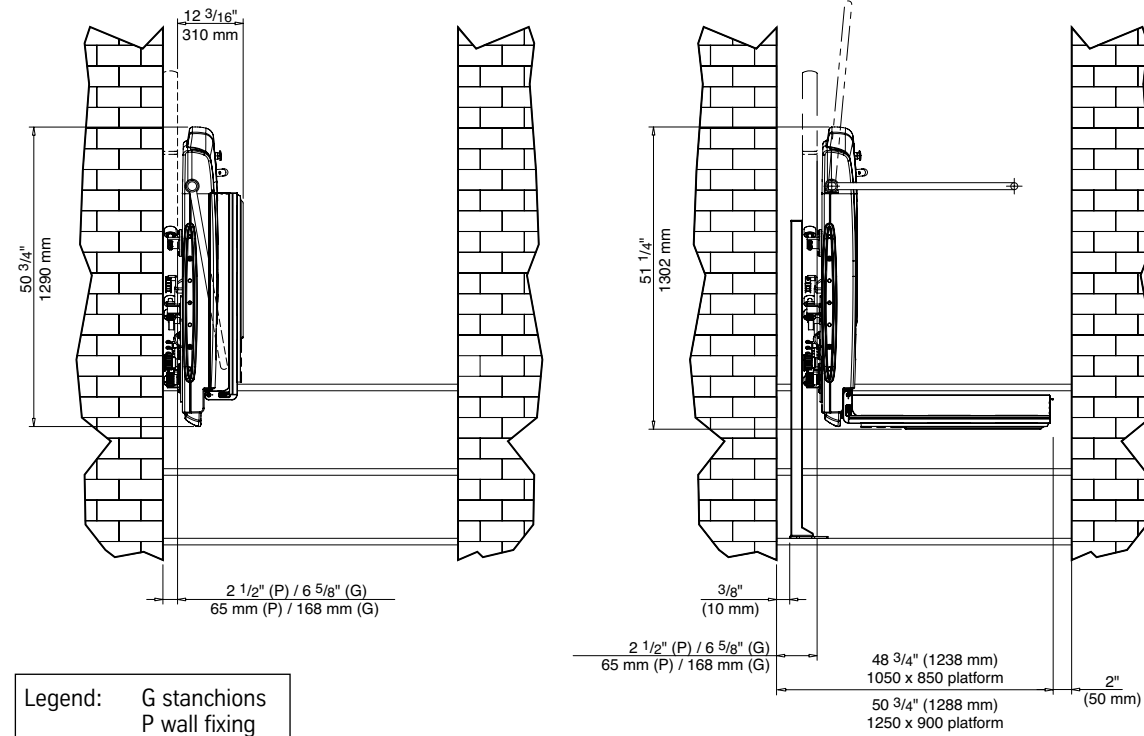

Rated load	<ul style="list-style-type: none"> • 660 lbs (300 kg) (0°-30°) • 550 lbs (250 kg) (up to 45°) 	Options <ul style="list-style-type: none"> • on wall remote control • radio remote control • cover cloth
Speed	• .46 ft/s (0.14 m/s)	
Power	• 0.75 kW (max)	
Power supply	• 230VAC; 60 Hz, 16 amps	
Auxiliary voltage	• 24V DC	
Maximum travel	• 131' (40 m)	
Max angle of incline	• Up to 45°	
Weight	<ul style="list-style-type: none"> • machine body 287 lbs (130 kg) approx. • rail 9.4 lbs/ft (14 kg/m) 	
Compliance	• ASME A18.1 e A17.5	
Certifications	• UL	

The photos, drawings and other information are simply an indication and could be modified without any notice.

©2010 ThyssenKrupp Access Manufacturing, LLC

Manufactured for:

ThyssenKrupp Access Manufacturing, LLC

4001 East 138th Street
Grandview, MO 64030

Phone: 800.829.9760

Email: sales@tkaccess.com

Internet: www.tkaccess.com

©2010 ThyssenKrupp Access Manufacturing, LLC

Journey Straight Inclined Platform Lift



ThyssenKrupp Access Manufacturing, LLC



ThyssenKrupp

The Company

We have worked for more than 60 years to improve our customers' independence, making their everyday life more comfortable and pleasant. We are proud of the more than 30 thousand lifts we have successfully manufactured but, above all, we are proud of the 30 thousand smiles we brought to our customers.



Journey™

The evolution of the species

Journey can undoubtedly be considered the culmination of our long experience in inclined platform lifts. Soft colors, rounded shapes, foldaway safety bars and space-saving technology are just some of the advantages of this seventh generation of ThyssenKrupp platform lifts.

A quality choice

Journey is made using high quality materials. All the exposed surfaces/parts (rail, platform, safety bars) are made of anodized aluminum to give you a rust free product. High precision construction and a pleasant look attest to the excellence of our product. The rail design complements its environment and can also be used as a handrail.

Journey can be installed both on vertical stanchions and directly on the walls.

Safe, Reliable, Robust

The lift is fitted with anti-crushing and anti-shearing safety devices as well as an audible emergency alarm. A rated load of 660 lbs (300 kg) and platform dimension up to 35"x49" (900 x 1250 mm) make the Journey an actual heavy duty product. Journey is suitable for indoor and outdoor installations.



Easy to use

An advanced ergonomic design developed with users' collaboration makes Journey the easiest, most comfortable and safe inclined lift on the market. A single, light touch, joystick allows the user to control all the machine functions. The standard Journey is fully automated: safety bars, ramp movements on three sides as well as the opening/closing of the platform are all motorized.

Standard and Optional Equipment

Journey, even in its basic configuration, provides you a complete range of standard options including an on-board foldable seat and a complete range of fittings. It can be further improved by adding remote control and cover cloth.